BD SENSORS®
pressure measurement

FURTHER STATEMENTS FOR THE PARAMETRISATION OF THE PRESSURE SWITCH

Dear customer,
please complete this form after your order and send it immediately back by email sale@bdsensors.cz. If you don´t make particular statements the pressure switch will be set according to the BD SENSORS standard (switching mode A, switching outputs enabled, set point by 80 percent, reset point by 75 percent, on delay and off delay disabled).

Company: .....

Order number: ..... Order position: .....

Please write the type and the ordering code of the pressure switch in the following line.

Serial number: ..... (is filled in by BD SENSORS)

Switching modes

A	Hysteresis mode	B	Hysteresis mode inverted	C	Window mode	D	Window mode inverted

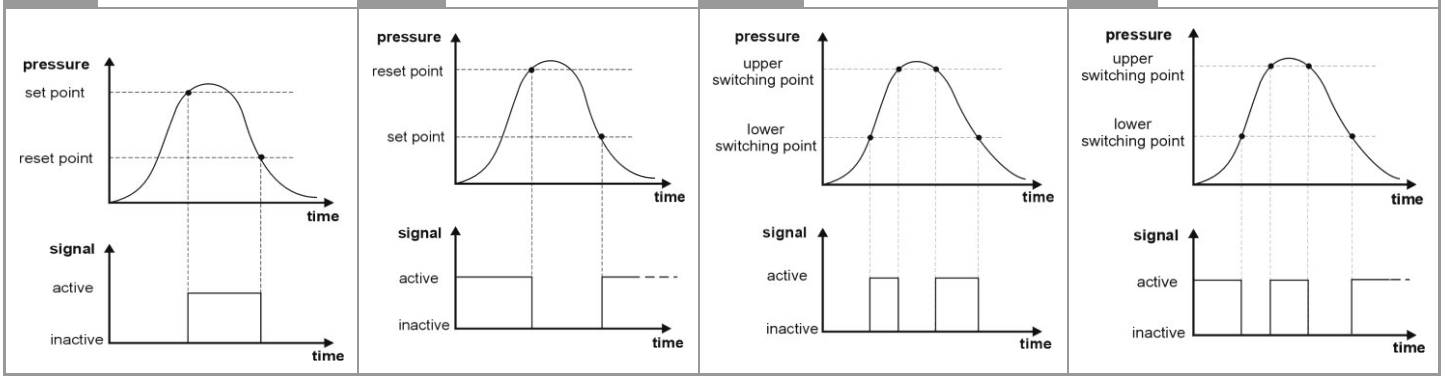

Parameter	Switching output 1	Switching output 2
Switching mode:	☐ **A** or ☐ **B** or ☐ **C** or ☐ **D**	☐ **A** or ☐ **B** or ☐ **C** or ☐ **D**
Set point/ lower switching point [1]:	..... %	..... % .....
Reset point/ upper switching point [1]:	..... %	..... % .....
On delay:	..... ms	..... ms
Off delay:	..... ms	..... ms

[1] in % of span or in the physical unit

.....
BD SENSORS job number

Date and signature: .....