



DMD 341

Differential Pressure Transmitter for Gases and Compressed Air in Compact Version

Silicon Sensor

accuracy according to IEC 60770:
0.35 % / 1% / 2%

Differential pressure

from 0 ... 6 mbar up to 0 ... 1000 mbar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

Special characteristics

- ▶ aluminium housing
- ▶ suited for non-aggressive gases and compressed air



Optional versions

- ▶ customer specific versions


The DMD 341 is a differential pressure transmitter for non-aggressive gases and compressed air. Because of its compact and robust aluminium housing it is particularly suited for machine and plant engineering.

Basic element of the DMD 341 is a piezoresistive stainless steel silicon sensor, which features high accuracy and excellent long term stability.

Preferred areas of use are

-  Plant and Machine Engineering
-  Heating and Air Conditioning

Preferred used for


-  Compressed Air,
Non-Aggressive Gases




Input pressure range												
Nominal pressure P_N (over, differential pressure) [mbar]	0...6	0...10	0...20	0...40	0...60	0...100	0...160	0...250	0...400	0...600	0...1000	
Nominal pressure P_N symmetric (differential pressure) [mbar]	± 6	± 10	± 20	± 40	± 60	± 100	± 160	± 250	± 400	± 600	± 1000	
Overpressure [mbar]	100	100	200	350	350	1000	1000	1000	1000	3000	3000	
Output signal / Supply												
Standard	standard pressure range: 2-wire: 4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$											
Options 3-wire	standard pressure range: 3-wire: 0 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$ 0 ... 10 V / $V_S = 14 \dots 30 V_{DC}$											
Performance												
Accuracy ¹	$P_N > 160$ mbar: $\leq \pm 0.35$ % FSO 40 mbar $\leq P_N \leq 160$ mbar: $\leq \pm 1$ % FSO $P_N < 40$ mbar: $\leq \pm 2$ % FSO											
Permissible load	current 2-wire: $R_{max} = [(V_S - V_S \text{ min}) / 0.02 \text{ A}] \Omega$ current 3-wire: $R_{max} = 500 \Omega$ voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$											
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k Ω											
Long term stability	$\leq \pm 0.2$ % FSO / year at reference conditions											
Response time	< 5 msec											
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)												
Thermal effects (Offset and Span) / Permissible temperatures												
Nominal pressure P_N [mbar]	≤ 10			≤ 20			≤ 250			> 250		
Tolerance band [% FSO]	$\leq \pm 2$			$\leq \pm 1.5$			$\leq \pm 1$			$\leq \pm 0.5$		
TC, average [% FSO / 10 K]	± 0.3			± 0.25			± 0.15			± 0.08		
in compensated range	0 ... 60 °C											
Permissible temperatures	medium: -25 ... 125 °C			electronics / environment: -25 ... 85 °C			storage: -40 ... 100 °C					
Electrical protection												
Short-circuit protection	permanent											
Reverse polarity protection	no damage, but also no function											
Electromagnetic compatibility	emission and immunity according to EN 61326											
Mechanical stability												
Vibration	10 g RMS (20 ... 2000 Hz)											
Shock	100 g / 11 msec											
Materials												
Pressure port	G1/8" internal: aluminium, silver anodized flexible tube connection $\varnothing 6.6 \times 11$: brass, nickel plated											
Housing	aluminium, silver anodised											
Seal (media wetted)	PUR, bonded											
Sensor	silicon, glass, RTV, ceramics Al_2O_3 , nickel											
Media wetted parts	pressure port, housing, seal, sensor											
Miscellaneous												
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μ H/m											
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA											
Weight	approx. 250 g											
Operational life	> 100 x 10 ⁶ pressure cycles											
CE-conformity	EMC Directive: 2014/30/EU											
Pin configuration												
Electrical connection	ISO 4400			M12x1 (4-pin)			cable colours (IEC 60757)					
Supply +	1			1			white					
Supply –	2			2			brown					
Signal + (only 3-wire)	3			3			green					
Shield	ground pin			4			yellow / green					

Wiring diagrams

2-wire-system (current)

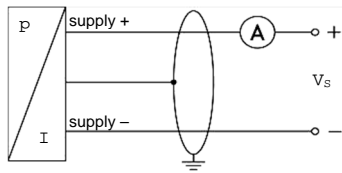


3-wire-system (current / voltage)

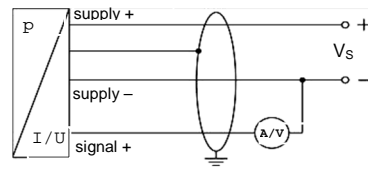


Electrical connections (dimensions in mm)

standard

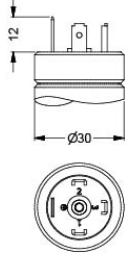


ISO 4400 (IP 65)

option

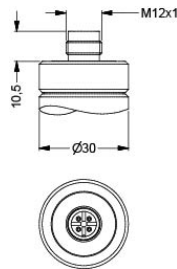

M12x1 4-pin (IP 67)

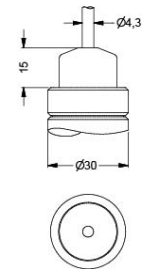


Cable outlet with PVC-cable (IP 67)²


² standard: 2 m PVC cable (without ventilation tube), optionally cable with ventilation tube

Mechanical connection (dimensions in mm)

Standard

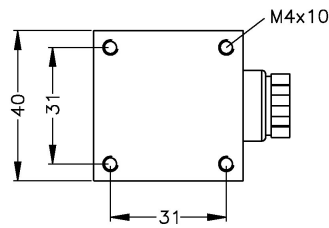

connector ISO 4400

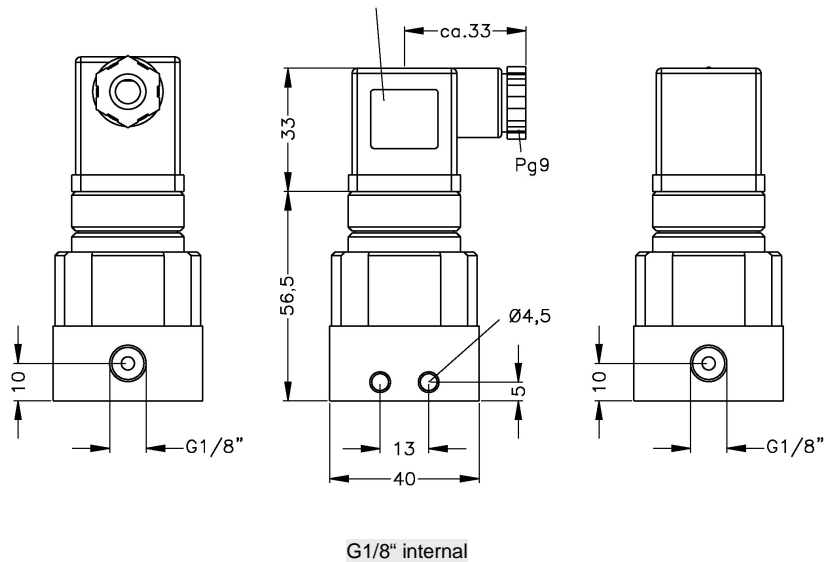

G1/8" internal

This data sheet contains product specification. properties are not guaranteed. Subject to change without notice.