

DMK 351

Pressure Transmitter

Ceramic Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO



Nominal pressure

from 0 ... 40 mbar up to 0 ... 20 bar

Output signal

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

others on request

Product characteristics

- ▶ high media resistance

Optional versions

- ▶ IS-version (temperature class T4)
Ex ia = intrinsically safe for gases and dusts
- ▶ IS-version (temperature class T6)
- ▶ diaphragm 99.9 % Al₂O₃
- ▶ customer specific versions

The pressure transmitter DMK 351 has been specially designed for applications in plant and machine engineering as well as laboratory techniques and is suitable for measuring small system pressure and filling heights.

By using our own-developed capacitive sensor, optionally available as Al₂O₃ 99.9%, the DMK 351 offers a high overpressure resistance and a high temperature and media resistance. The pressure transmitter is available in an intrinsically safe version for a use in explosive environments.

Preferred areas of use are



Plant and Machine Engineering



Laboratory Techniques

Preferred used for



Fuel and Oil



Water



Pressure ranges																	
Nominal pressure ¹	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	20	
Level	[mH ₂ O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	200	
Overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35	45	45	
Low pressure	[bar]	-0.2		-0.3		-0.5							-1				
¹ available in gauge and absolute; nominal pressure ranges absolute from 1 bar																	
Output signal / Supply																	
Standard	2-wire:	4 ... 20 mA / V _S = 9 ... 32 V _{DC}															
Option IS-protection	2-wire :	4 ... 20 mA / V _S = 14 ... 28 V _{DC}															
	Option 3-wire:	0 ... 10 V / V _S = 12.5 ... 32 V _{DC}															
Performance																	
Accuracy ¹	standard:	≤ ± 0.35 % FSO															
	option for P _N ≥ 0.6 bar:	≤ ± 0.25 % FSO															
Permissible load	current 2-wire R _{max} = [(V _S - V _{Smin}) / 0.02 A] Ω	voltage 3-wire: R _{min} = 10 kΩ															
Influence effects	supply:	0.05 % FSO / 10 V															
	load:	0.05 % FSO / kΩ															
Long term stability	≤ ± 0.1 % FSO / year at reference conditions																
Turn-on time	700 msec																
Mean measuring rate	5/sec																
Response time	mean response time:	< 200 msec										max. response time:	380 msec				
¹ accuracy according to IEC 60770 - limit point adjustment (non-linearity, hysteresis, repeatability)																	
Thermal errors (Offset and Span)																	
Tolerance band	≤ ± 0.1 % FSO / 10 K in compensated range: -20 ... 80 °C																
Permissible temperatures																	
Permissible temperatures	medium:	-40 ... 125 °C															
	electronics / environment:	-40 ... 85 °C															
	storage:	-40 ... 100 °C															
Electrical protection																	
Short-circuit protection	permanent																
Reverse polarity protection	no damage, but also no function																
Electromagnetic compatibility	emission and immunity according to EN 61326																
Mechanical stability																	
Vibration	10 g RMS (20 ... 2000 Hz) according to DIN EN 60068-2-6																
Shock	100 g / 1 msec according to DIN EN 60068-2-27																
Materials																	
Pressure port	standard:	stainless steel 1.4404 (316L)															
	option ³ :	PP, PVDF															
Housing	standard:	stainless steel 1.4404 (316L)															
	option ³ :	PP, PVDF															
Option compact field housing	stainless steel 1.4305 (304); cable gland M12x 1.5, brass, nickel plated (clamping range 2...8 mm)																
Seal (media wetted)	FKM EPDM																
Diaphragm	standard:	ceramics Al ₂ O ₃ 96 %															
	option:	ceramics Al ₂ O ₃ 99.9 %															
Media wetted parts	pressure port, seals, diaphragm																
³ only with mech. connection G1/2" DIN 3852 open port, bore 12 mm, P _N ≤ 10 bar, min. permissible temperature -30 °C and without IS-protection possible																	
IS-protection (only for 4 ... 20 mA / 2-wire)																	
Approval DX4-DMK 351	IBExU05ATEX1069 X zone 0: II 1G Ex ia IIC T4 Ga option: II 1G Ex ia IIC T6 Ga zone 20: II 1D Ex IIIC T85°C Da																
Safety technical maximum values	U _i = 28 V _{DC} , I _i = 93 mA, P _i = 660 mW, C _i ≤ 27 nF, L _i ≤ 5 μH, C _{gnd} = 27 nF																
Max. permissible temperature for environment	in zone 0:	-20 ... 60 °C for p _{atm} 0.8 bar up to 1.1 bar															
	in zone 1 and higher:	-25 ... 70 °C															
	for T6:	-25 ... 60 °C															
Connecting cables (by factory)	Cable capacity: signal line / shield also signal line / signal line: 160 pF/m Cable inductance: signal line / shield also signal line / signal line: 1 μH/m																
Miscellaneous																	
Installation position	any																
Current consumption	signal output current: max. 21 mA	signal output voltage: max. 5 mA															
Weight	min. 200 g																
Operational life	> 100 x 10 ⁶ loading cycles																
CE-conformity	EMC-directive: 2014/30/EU																
ATEX Directive	2014/34/EU																


DMK 351

Pressure Transmitter


Technical Data

Wiring diagram

2-wire-system (current)



3-wire-system (current / voltage)


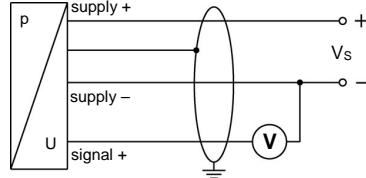


Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal +	3	1	3	OUT +	gn (green)
Shield	ground contact	5	4		ye/gn (yellow / green)




Electrical connections (dimensions in mm)

standard





ISO 4400 (IP 65)


options


M12x1 4-pin (IP 67)



cable outlet with PVC-cable (IP 67) ⁴



cable outlet, cable with ventilation tube (IP 68) ⁵




compact field housing (IP 67)

⁴ standard: 2 m PVC-cable without ventilation tube (permissible temperature: -5 ... 70°C), optional cable with ventilation tube
⁵ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connection (dimensions in mm)

standard

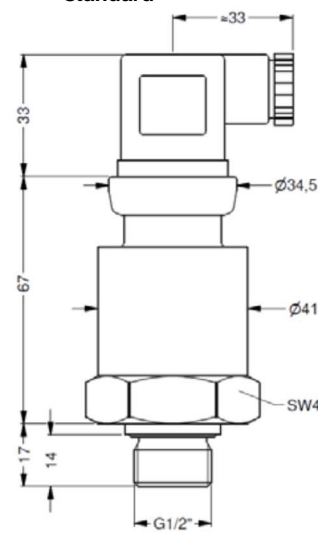


G1/2" DIN 3852


options



G1/2" EN 837



1/2" NPT



PP / PVDF
G1/2" DIN 3852 open port,
bore 12 mm, P_N ≤ 10 bar

This data sheet contains product specification. Properties are not guaranteed. Subject to change with notice.

DMk351_EN_17.07.2019

Tel.: +420 572 411 011
Fax: +420 572 411 497

www.bdsensors.cz
info@bdsensors.cz

BD SENSORS[®]
pressure measurement