

# DMK 456

## Pressure Transmitter with Stainless Steel Field Housing

Special application:  
Marine and Offshore

accuracy according to IEC 60770:  
standard: 0.25 % FSO  
option: 0.1 % FSO



### Nominal pressure

from 0 ... 40 mbar up to 0 ... 20 bar

### Output signals

2-wire: 4 ... 20 mA  
others on request

### Product characteristics

- ▶ LR-certificate (Lloyd's Register)
- ▶ ABS-certificate (American Bureau of Shipping)
- ▶ certifikát DNV•GL (Det Norske Veritas • Germanischer Lloyd)
- ▶ CCS-certificate (China Classification Society)
- ▶ stainless steel field housing
- ▶ IS-version (temperature class T6)  
Ex ia = intrinsically safe for gases
- ▶ high overpressure resistance






### Optional versions

- ▶ diaphragm Al<sub>2</sub>O<sub>3</sub> 99.9 %
- ▶ different inch threads and flush versions

The pressure transmitter DMK 456 has been developed for measuring the pressure in systems and the level in tanks and is certificated for shipbuilding and offshore applications.

Due robust stainless steel field housing and the possibility to use the device in intrinsic safe areas (temperature class T6) enable to measure the pressure of aggressive gases and fluids under extreme operating conditions. The basis for the DMK 456 is a capacitive ceramic sensor element designed by BD SENSORS, which offers a high overload resistance and medium compatibility.

### Preferred areas of use are

-  Monitoring of the pressure during loading and unloading processes
-  Monitoring of a ship's position and draught
-  Use in anti-heeling systems
-  Level measurement in ballast and storage tanks
-  Monitoring of the internal pressure in liquid gas cargo tanks



# DMK 456

Pressure Transmitter with Stainless Steel Field Housing

Technical Data

Pressure ranges																
Nominal pressure <sup>1</sup>	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	20
Level	[mH <sub>2</sub> O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	200
Permissible overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35	45	45
Permissible vacuum	[bar]	-0.2		-0.3		-0.5							-1			

<sup>1</sup> available in gauge and absolute; nominal pressure ranges absolute from 1 bar

Output signal / Supply	
Standard	IS-version 4 ... 20 mA / 2-wire      V <sub>S</sub> = 14 ... 28 V <sub>DC</sub> V <sub>S rated</sub> = 24 V <sub>DC</sub>
Performance	
Accuracy <sup>2</sup>	standard: ≤ ± 0.25 % FSO options: P <sub>N</sub> ≥ 0.6 bar <sup>3</sup> : ≤ ± 0.1 % FSO
Permissible load	R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω
Long term stability	≤ ± 0.1 % FSO / year at reference conditions
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ
Turn-on time	700 msec
Mean response time	< 200 msec      mean measuring rate 5/sec
Max. response time	380 msec

<sup>2</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

<sup>3</sup> Under the influence of disturbance burst according to EN 61000-4-4 (2004) +2 kV accuracy decreased to ≤ ± 0.25 % FSO.

Thermal effects / Permissible temperatures	
Thermal error	≤ ± 0.1 % FSO / 10 K      in compensated range -20 ... 80 °C
Permissible temperatures	medium: -25 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 100 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to - EN 61326 - DNV•GL Det Norske Veritas • Germanischer Lloyd

Mechanical stability	
Vibration	4 g (according to DNV•GL: class B, curve 2 / basis: IEC 60068-2-6)

Materials	
Pressure port	stainless steel 1.4404 (316 L)
Housing	stainless steel 1.4404 (316 L)
Cable gland	brass, nickel plated others on request
Seals	FKM; others on request
Diaphragm	standard: ceramics Al <sub>2</sub> O <sub>3</sub> 96 % option: ceramics Al <sub>2</sub> O <sub>3</sub> 99.9 %
Media wetted parts	pressure port, seals, diaphragm

Environment category		
Lloyd's Register (LR)	EMV1, EMV2, EMV3, EMV4	certification number: 13/20055
Det Norske Veritas • Germanischer Lloyd (DNV•GL)	temperature: D      humidity: B vibrations: B      housing: D elektromagnetic compatibility: B	certification number: TAA00001GR

Explosion protection	
Approval DX4A-DMK 456	IBExU07ATEX1179 X zone 0: II 1G Ex ia IIC T6 Ga
Safety techn. maximum values	U <sub>i</sub> = 28 V, I <sub>i</sub> = 93 mA, P <sub>i</sub> = 660 mW, C <sub>i</sub> = 52.3 nF, L <sub>i</sub> = 0 μH, the supply connections have an inner capacity of max. 90.2 nF opposite the enclosure
Permissible temperatures for environment	-20 ... 60 °C

Miscellaneous	
Ingress protection	IP 67
Installation position	any
Current consumption	max. 21 mA
Weight	min. 400 g (depending on housing and mechanical connection)
Operational life	100 million load cycles
CE conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU


# DMK 456

Transmitter with Stainless Steel Field Housing

Technical Data

## Wiring diagram

2-wire-system (current)

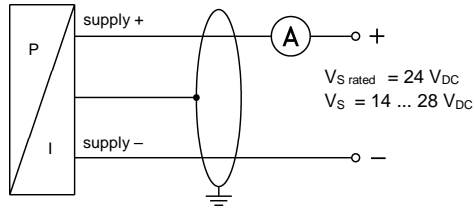





## Pin configuration

Electrical connections	field housing (clamp section: 2.5 mm <sup>2</sup> )
Supply +	VS+
Supply -	VS-
Ground	GND

## Dimensions (in mm/in)

Inch thread

Flange

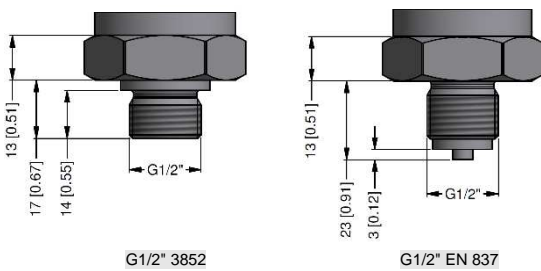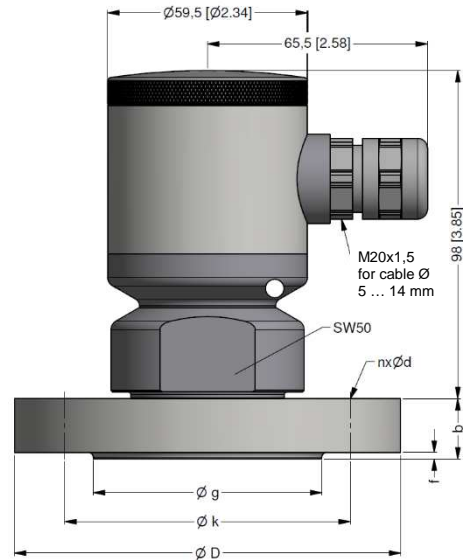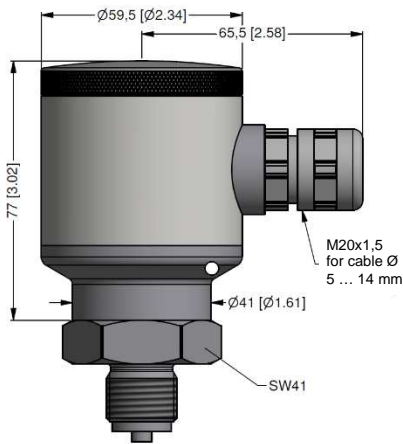

size	DIN 2501			ANSI	
	DN25/PN40	DN50/PN40	DN80/PN16	2"/150 lbs	3"/150 lbs
b	18	20	20	19.1	23.9
d	14	18	18	19.1	19.1
D	115	165	200	152.4	190.5
f	2	3	3	2	2
g	68	102	138	91.9	127
k	85	125	160	120.7	152.4
n	4	4	8	4	4
pN [bar]	≤ 40	≤ 40	≤ 16	≤ 10	≤ 10

© 2019 BD SENSORS s.r.o. – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

The manufacturer provides the EU declaration of conformity.

Calibration - All production undergoes output control, which is performed by comparison with standards. The traceability of standards and working gauges is ensured in accordance with Act No. 505/1990, as amended, on metrology.

The manufacturer offers the possibility to supply sensors calibrated in the calibration laboratory of BD SENSORS, accredited according to ČSN EN ISO / IEC 17025: 2018.