

LMK 458H

Probe with HART®-communication for Marine and Offshore

Ceramic Sensor

accuracy according to EN IEC 62828-2:
0.1 % span



Nominal pressure

from 0 ... 60 cmH₂O up to 0 ... 200 mH₂O

Output signals

2-wire: 4 ... 20 mA, others on request

Special characteristics

- ▶ shipping approvals acc. to:
Lloyd's Register (LR), Det Norske
Veritas (DNV)
China Classification Society (CCS), Ameri-
can Bureau of Shipping (ABS)
- ▶ diameter 39.5 mm
- ▶ HART® communication (setting of
offset, span and damping)
- ▶ high overpressure resistance
- ▶ high long-term stability

Optional versions

- ▶ IS-version Ex ia = intrinsically safe for gas
and dust
- ▶ diaphragm Al₂O₃ 99.9 %
- ▶ different housing materials
(stainless steel, CuNiFe)
- ▶ screw-in and flange version
- ▶ accessories e. g. assembling and
probe flange, mounting clamp

The hydrostatic probe LMK 458H has been devel-
oped for measuring level in service and storage
tanks and is as a consequence of the certification
by Germanischer Lloyd predestined for shipbuild-
ing and offshore applications.

A permissible operating temperature of up to
85 °C and the possibility to use the device in
intrinsic safe areas enable to measure the pressure
of various fluids under extreme conditions. The
basis for the LMK 458H is a capacitive ceramic
sensor element, which offers a high overload re-
sistance and medium compatibility.

Preferred areas of use are

 Water
Drinking water abstraction
Desalinization plant

 Shipbuilding / Offshore
Ballast tanks
Draught monitoring
Level measurement in ballast and sto-
rage tanks




Pressure ranges									
Nominal pressure ¹	[bar]	0.06	0.16	0.4	1	2	5	10	20
Level	[mH ₂ O]	0.6	1.6	4	10	20	50	100	200
Overpressure	[bar]	2	4	6	8	15	25	35	45
¹ On customer request we adjust the devices by software on the required pressure ranges, within the turn-down possibility (starting at 0.02 bar).									
Output signal / Supply									
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC} with HART® communication					V _{S rated} = 24 V _{DC}			
Option IS-version	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC} with HART® communication					V _{S rated} = 24 V _{DC}			
Performance									
Accuracy ²	P _N ≥ 160 mbar	TD ≤ 5:1		≤ ± 0.2 % span				TD _{max} = 10::1	
	P _N < 160 mbar	TD > 5:1		≤ ± [0.2 + 0.03 x TD] % span				TD _{max} = 3:1	
		P _N ≥ 0.6 bar	TD ≤ 5:1		≤ ± 0.1 % span				TD _{max} = 10:1
		TD > 5:1		≤ ± [0.1 + 0.02 x TD] % span					
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω					load at HART®-communication: R _{min} = 250 Ω			
Long term stability	≤ ± (0.1 x turn-down) span / year at reference conditions								
Influence effects	supply: 0.05 % span / 10 V					permissible load: 0.05 % span / kΩ			
Turn-on time	850 msec								
Mean response time	140 msec without consideration of electronic damping						mean measuring rate 7/sec		
Max. response time	380 msec								
Adjustability	configuration of following parameters possible (interface / software necessary ³): - electronic damping: 0 ... 100 sec - offset: 0 ... 80 % span - turn down of span: max. 10:1								
² accuracy according to EN IEC 62828-2- limit point adjustment (non-linearity, hysteresis, repeatability)									
³ software, interface, and cable have to be ordered separately (software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or higher, and XP)									
Thermal effects (Offset and Span) / Permissible temperatures									
Tolerance band	≤ ± [0.2 x turn-down] % span								
TC, average	≤ ± [0.02 x turn-down] % span / 10 K								
in compensated range	-20 ... 80 °C								
Permissible temperatures	medium / electronics / environment / storage: -25 ... 85 °C								
Electrical protection ⁴									
Short-circuit protection	permanent								
Reverse polarity protection	no damage, but also no function								
Electromagnetic compatibility	emission and immunity according to - EN 61326 - DNV (Det Norske Veritas)								
⁴ additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available									
Mechanical stability									
Vibration	4 g (according to DNV: class B, curve 2 / basis: DIN EN 60068-2-6)								
Electrical connection									
Cable outlet with sheat material ⁵	shielded cable with integrated air tube for atmospheric reference (for nominal pressure ranges absolute, the air tube is closed)								
Materials (media wetted)									
Housing	standard: stainless steel 1.4404 (316L)					option: CuNi10Fe1Mn (resistant against sea water) others on request			
Cable sheath	TPE -U (-25 ... 125 °C) (flame-resistant, halogen free, increased resistance against oil and gasoline, resistant against salt, sea water, heavy oil)								
Seals	FKM; FFKM; EPDM others on request								
Diaphragm	standard: ceramics Al ₂ O ₃ 96 %					option: ceramics Al ₂ O ₃ 99.9 %			
Nose cone	POM								
Category of the environment									
Lloyd's Register (LR)	EMV1, EMV2, EMV3, EMV4					number of certificate: 13/20056			
Det Norske Veritas (DNV)	temperature: D		humidity: B		number of certificate: TAA00001GM				
	vibration: B		enclosure: D						
	electromagnetic compatibility: B								
Miscellaneous									
Option cable protection for probes in stainless steel	prepared for mounting with stainless steel pipe								
Ingress protection	IP 68								
Current consumption	max. 21 mA								
Weight	min. 650 g (without cable)								
CE-conformity	EMC Directive: 2014/30/EU								
ATEX Directive	2014/34/EU								

LMK 458H

Hydrostatic Probe

Technical Data

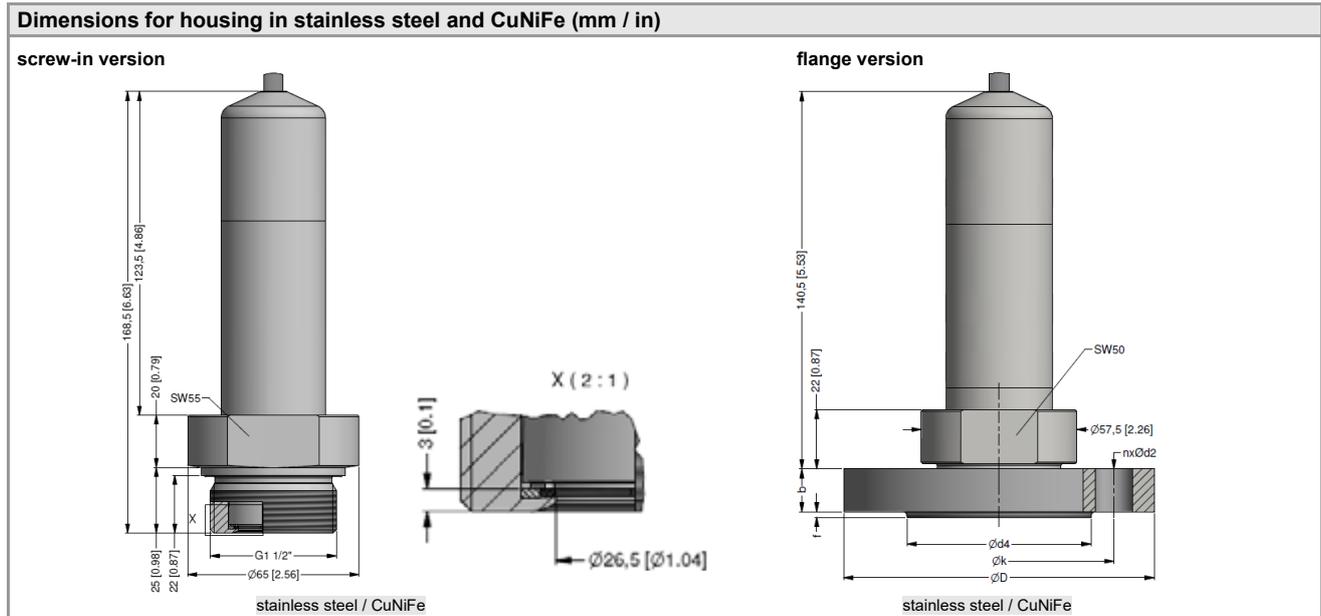

Accessories

Transmitter flange for flange version		
Technical data		
Suitable for	LMK 382, LMK 382H, LMK 458, LMK 458H	
Flange material	stainless steel 1.4404 (316L)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, d4 = 68, b = 18, f = 2, n = 4, d2 = 14	1.2 kg
DN50 / PN40	D = 165, k = 125, d4 = 102, b = 20, f = 3, n = 4, d2 = 18	2.6 kg
DN80 / PN16	D = 200, k = 160, d4 = 138, b = 20, f = 3, n = 8, d2 = 18	4.1 kg
Ordering type		Ordering code
Transmitter flange DN25 / PN40		5000389
Transmitter flange DN50 / PN40		5000390
Transmitter flange DN80 / PN16		5000392
Mounting flange with cable gland		
Technical data		
Suitable for	all probes	
Flange material	stainless steel 1.4404 (316L)	
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305; plastic	
Seal insert	material: TPE (ingress protection IP 68)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	4.8 kg
Ordering type		Ordering code
DN25 / PN40 with cable gland brass, nickel plated		5000275
DN50 / PN40 with cable gland brass, nickel plated		5000278
DN80 / PN16 with cable gland brass, nickel plated		5000279

cable gland M16x1.5 with seal insert (for cable- \varnothing 4 ... 11 mm)

Surcharges for calibration are not subject to any discounts. Subject to change.

This document contains the specification for ordering the product; detailed technical parameters of the product and its possible variants are given in the data sheet.

BD SENSORS reserves the right to change sensor specifications without further notice.

HART® is registered trade-mark HART Communication Foundation

- 1 nominal pressure ranges absolute from 1 bar
- 2 mounting accessories are not part of supply and have to be ordered separately
- 3 min. permissible temperature from -15 °C
- 4 shielded cable with integrated ventilation tube for atmospheric reference
- 5 possible for probes in stainless steel; stainless steel pipe is not part of the supply

